





## Erp. (Energy Related Products)


Information on Directive 2009/125/EC can be downloaded from the SODECA website or the QuickFan selector programme.

### Acoustic characteristics

Sound power spectrum Lw(A) in dB(A) per Hz frequency band  
Irradiated values at maximum speed and medium flow rate.

	63	125	250	500	1000	2000	4000	8000
CJK/EC-220	50	50	43	50	44	42	45	45
CJK/EC-250	46	44	43	45	55	35	34	30
CJK/EC-310	30	44	33	32	44	25	24	19
CJK/EC-400	37	52	41	42	34	29	27	27
CJK/EC-500	30	42	45	50	50	50	47	41

### Dimensions mm

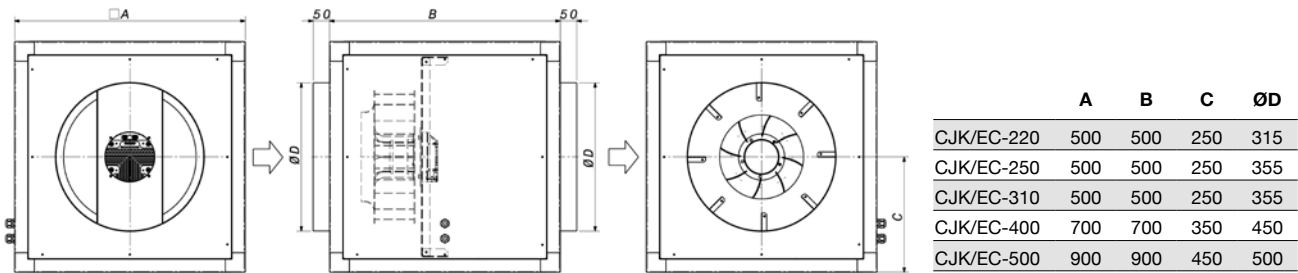


### Characteristic curves

Q= Flow rate in m<sup>3</sup>/h, m<sup>3</sup>/s and cfm

Pe= Static pressure in mm H<sub>2</sub>O, Pa and inwg



#### CJK/EC-220

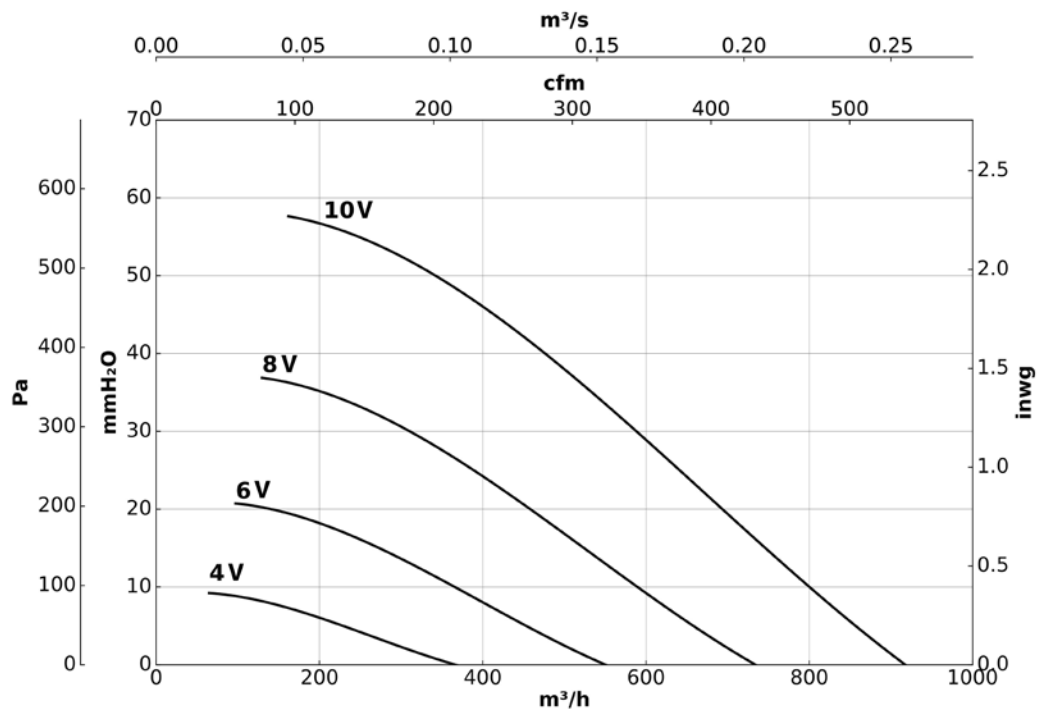

### Characteristic curves

Q= Flow rate in m<sup>3</sup>/h, m<sup>3</sup>/s and cfm

Pe= Static pressure in mm H<sub>2</sub>O, Pa and inwg

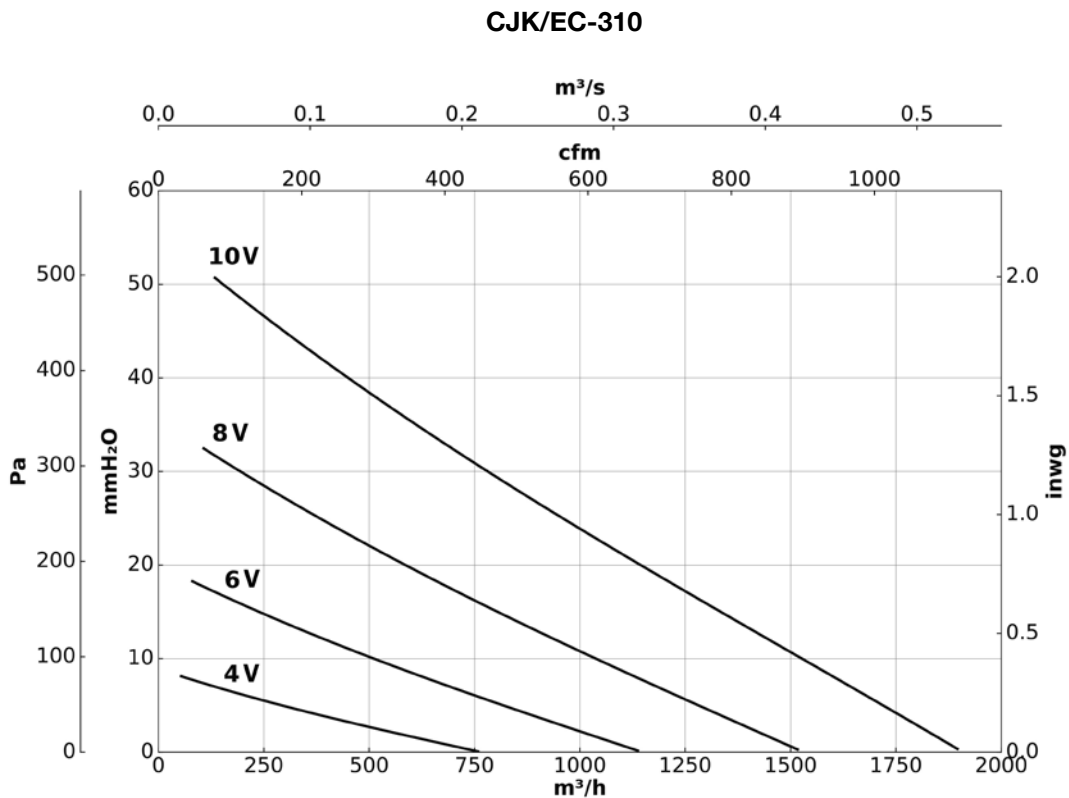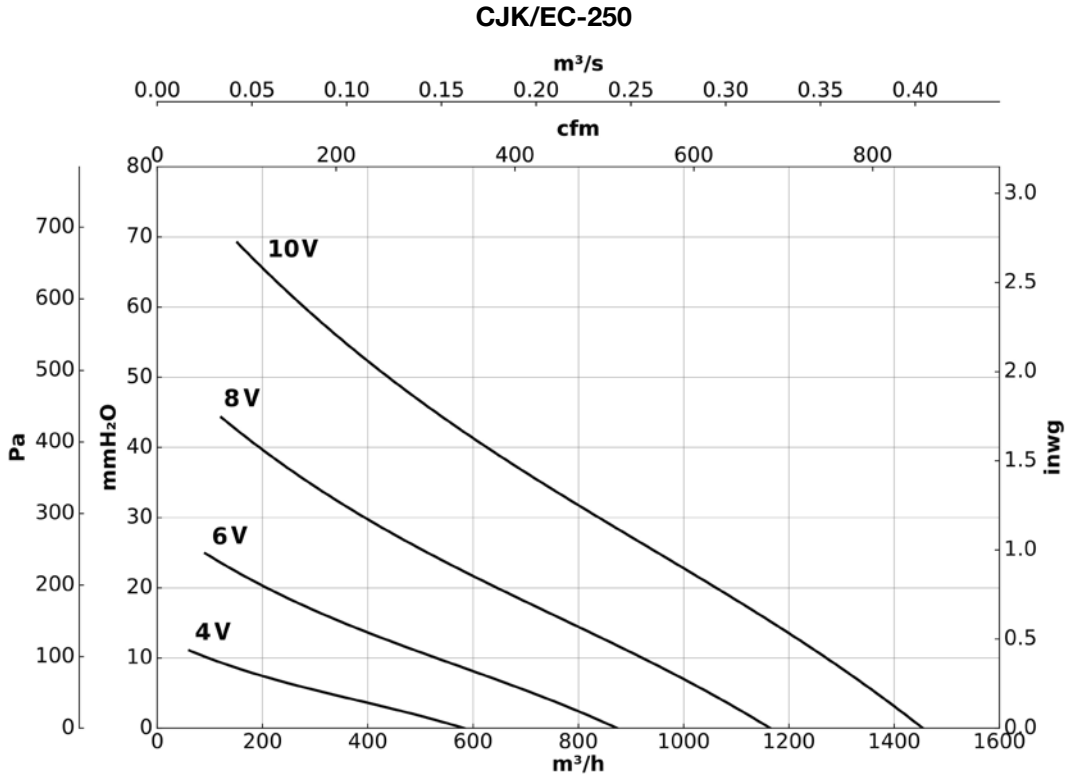


### Characteristic curves

Q= Flow rate in m<sup>3</sup>/h, m<sup>3</sup>/s and cfm

Pe= Static pressure in mm H<sub>2</sub>O, Pa and inwg

#### CJK/EC-400

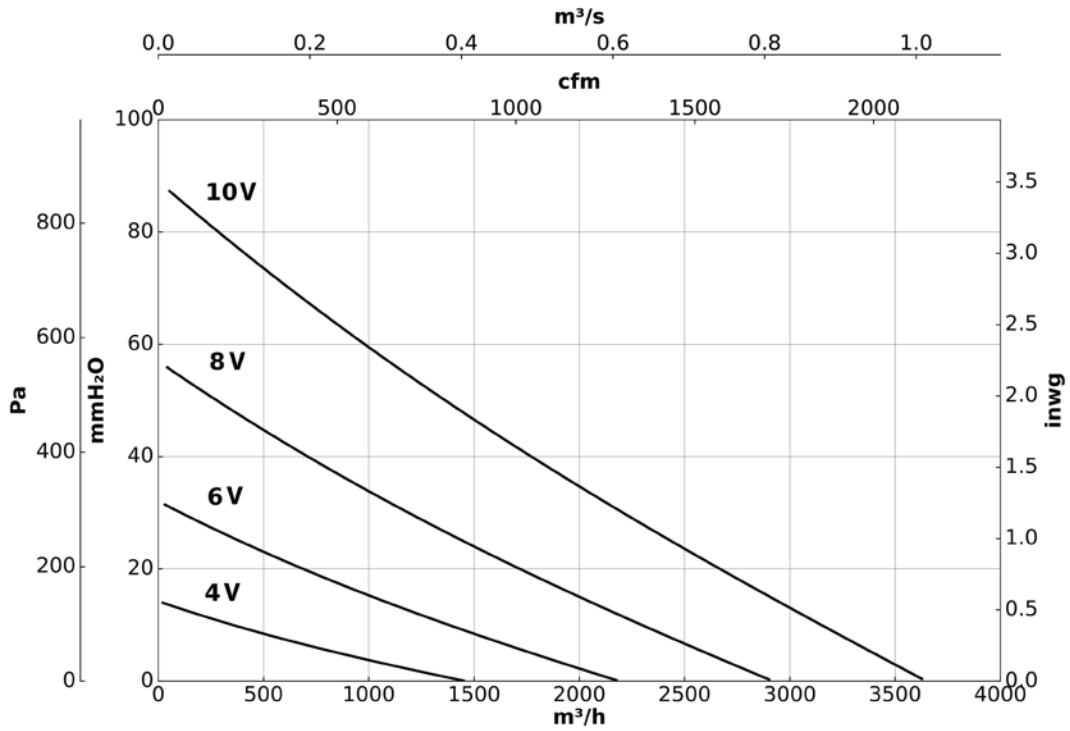

#### CJK/EC-500

